





MBK300S Installation Manual

COMPONENTS

MBK310 FX Series fly frame	1x	
MBK320 Connection board set 20°-60°	2x	
MBK315 Side board set for FX3.15	2x	
FX3.15 Loudspeaker cabinet (not included with MBK300S)	1x	
Steel safety wire Ø 8 mm - 3250 mm (not included with MBK300S, to be sourced locally because of local legislation)	1x	
Bow shackle 1.5ton (not included with MBK300S, to be sourced locally because of local legislation)	1x	
ISO 4762 - M10 x 20 mm + DIN 7980 - M10	8x	

MBK300S Installation Manual

IMPORTANT SAFETY INSTRUCTIONS

READ FOLLOWING INSTRUCTIONS FOR YOUR OWN SAFETY

Read these instructions and keep them. Never throw them away

Heed all safety warnings

Follow all instructions

Personnel qualification

Installation and set-up should only be carried out by qualified personnel that are familiar with rigging techniques and safety recommendations that are outlined in this manual.

System parts and rigging instruction

All system components must be inspected before use, in order to detect any possible defects. Any part showing any sign of defect must immediately be put aside and withdrawn from use to be inspected by qualified service personnel.

Additional rigging equipment

Only use rigging and mounting accessories which are specified by the manufacturer of this mounting bracket. It is the users responsibility to ensure that the working load limit of additional accessories is greater than the total weight of the loudspeaker assembly.

Suspension points

It is the users responsibility to ensure that the suspension points can support the total weight of the loudspeaker assembly.

Local regulations

Some countries require higher safety factors and rigging approvals. Always follow the local regulations, even if otherwise specified in this instruction manual. It is the users responsibility to guarantee that all mountings and connections are made in accordance with all applicable local regulations.

Flying a loudspeaker assembly

Always ensure that nobody is standing underneath the loudspeaker assembly when it is being raised. Never leave the system unattended during the installation process.

Dynamic load

When a loudspeaker assembly is deployed in an open air environment, wind effects should be taken into account. Wind can produce dynamic stress to the bracket components and suspension points.

Periodic inspection

If all the system components are inspected and approved before use and installed as described in this manual, they will remain fully operational over the systems lifetime. However, an annual system inspection of the system and especially the suspension points shall be performed by qualified personnel to check for any defects caused by external influences.




CE DECLARATION OF CONFORMITY

This product conforms to all the essential requirements and further relevant specifications described in following directives:
2006/42/EC Machinery directive


MBK300S Installation Manual

PROCEDURE

- 1 Remove the U-profiles from FX3.15 cabinet at both sides. Keep the bolts nearby because you will need them in step 2.

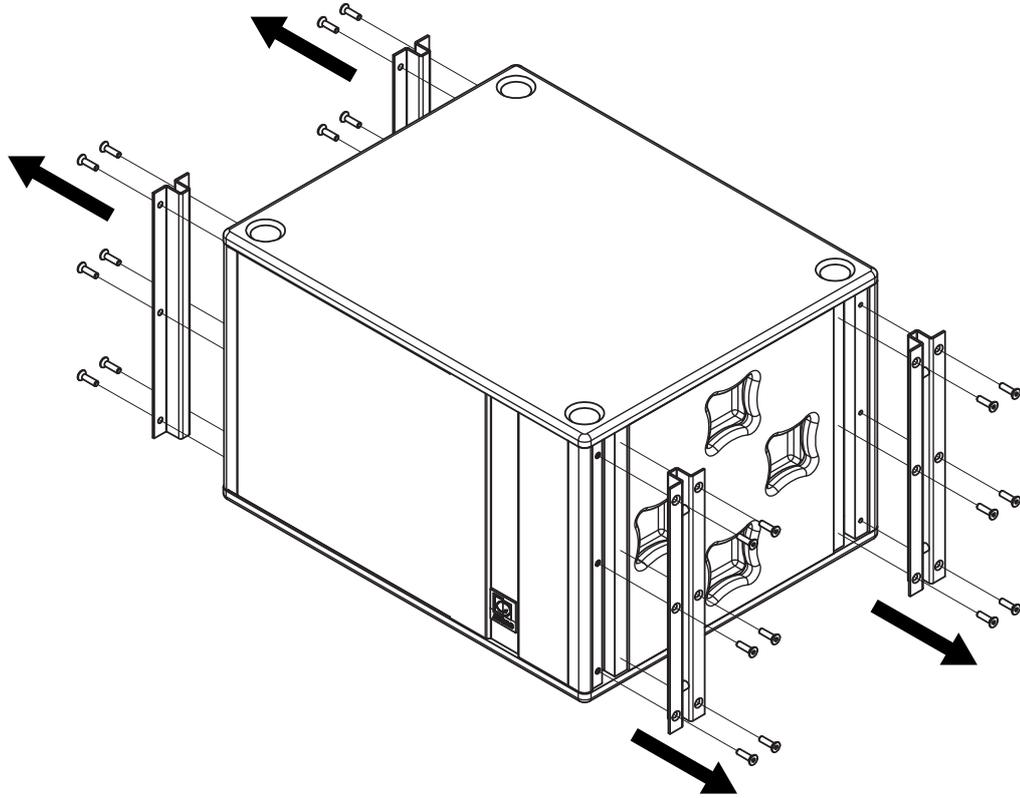


- 2 Mount the FX3.15 side plates to the FX3.15 cabinet. You can use the bolts that were removed in step 1.

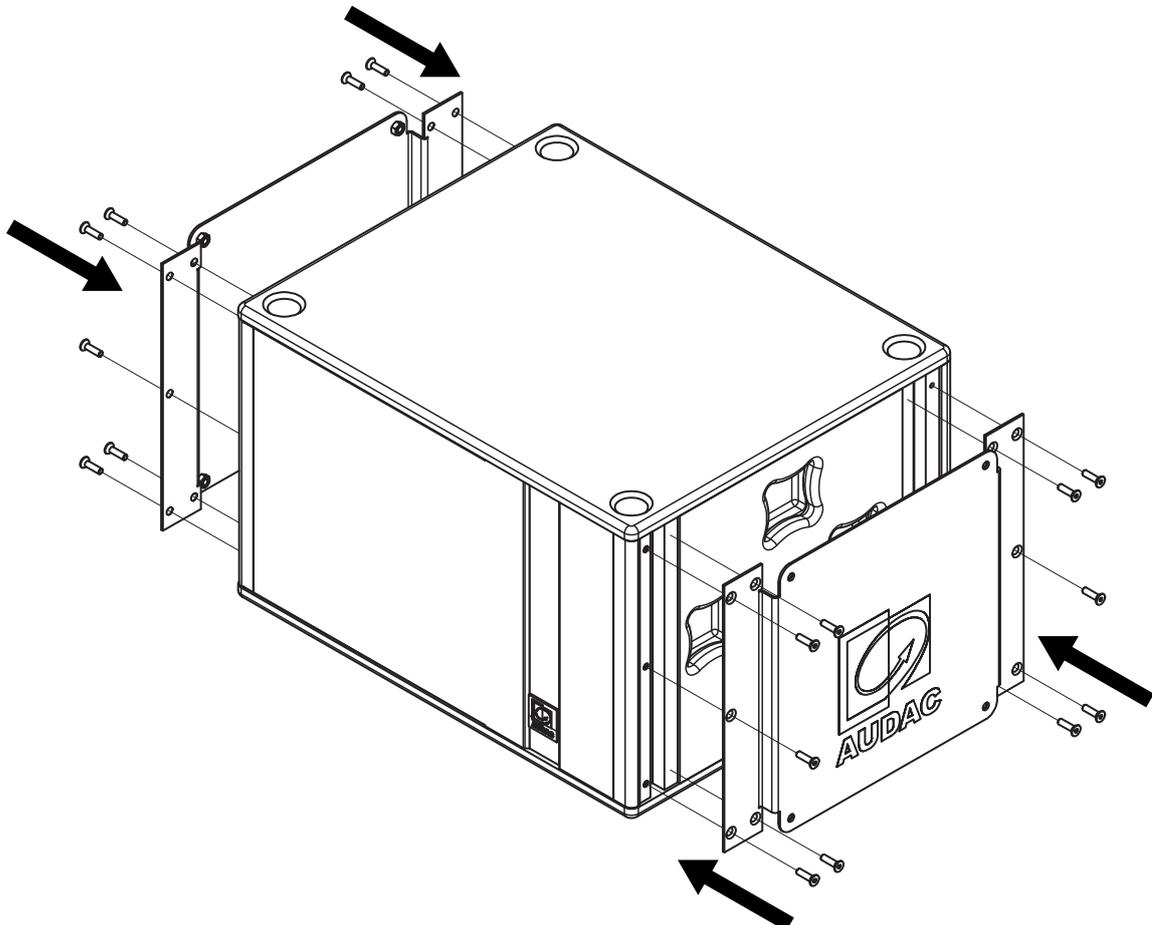


MBK300S Installation Manual

- 3** Mount the frame onto the ceiling.

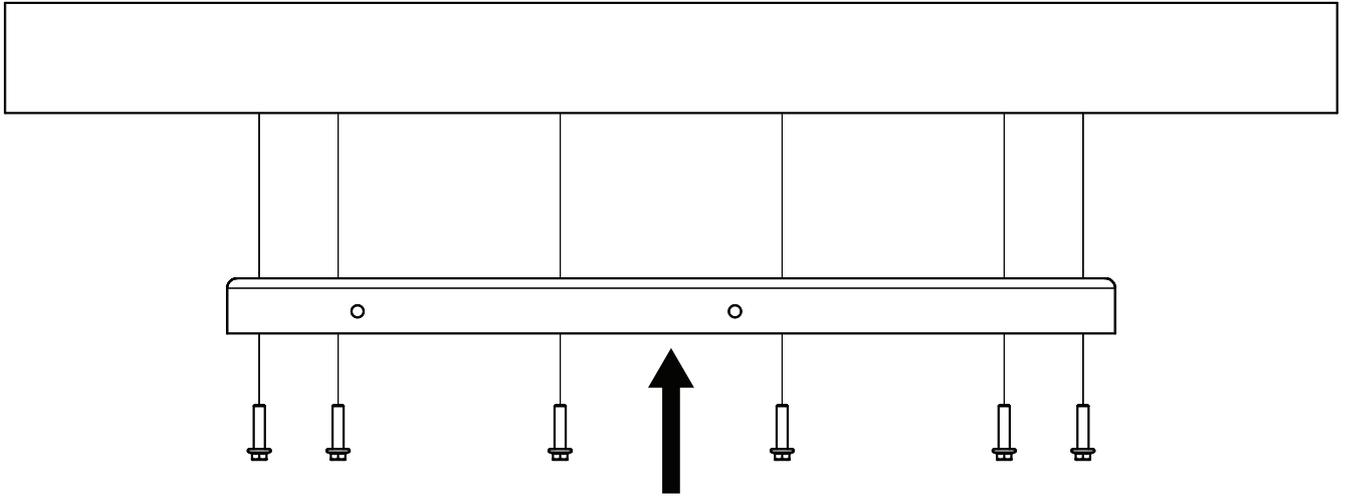


- 4** Attach the angle adjustment plates to frame using 4x ISO 4762 M10 x 20mm bolts and 4x DIN 7980 M10 spring lock washers.

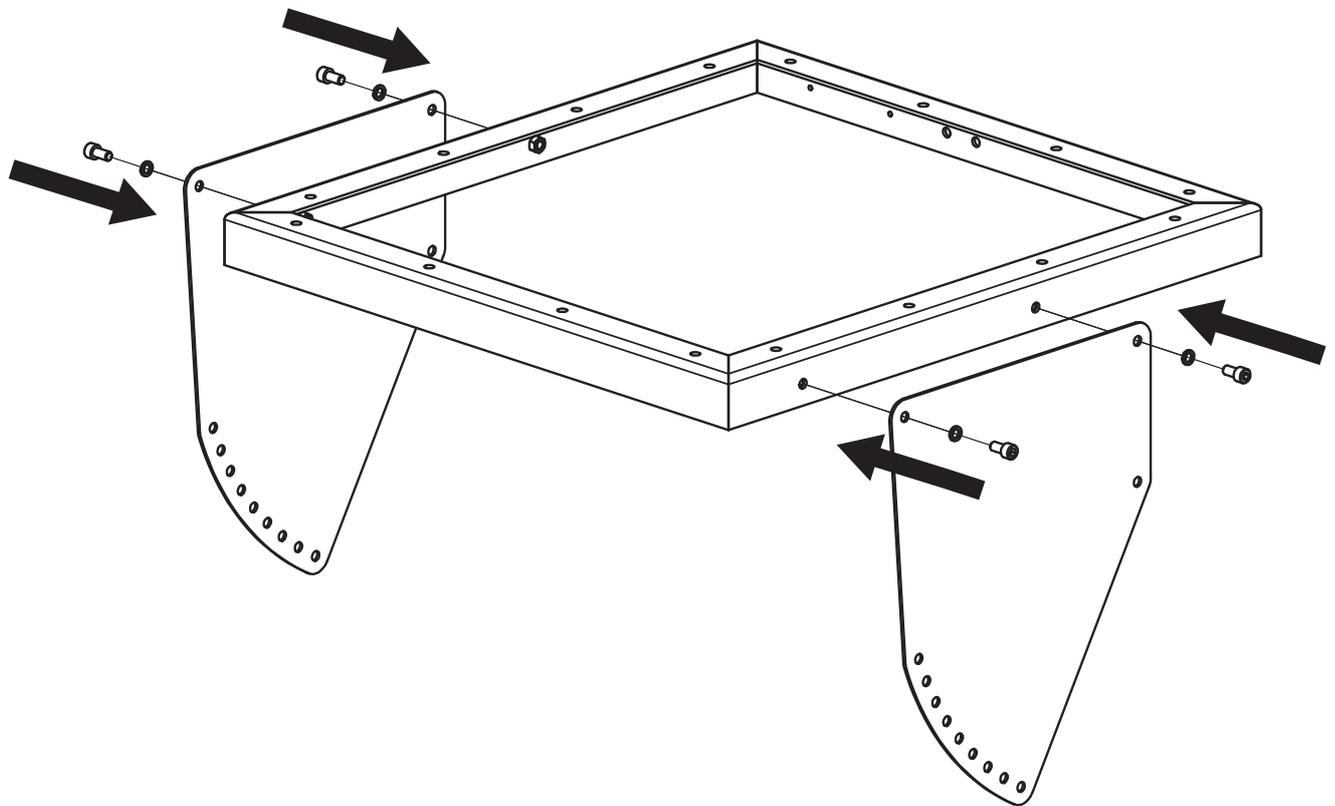

MBK300S Installation Manual

- 5** Slide the FX3.15 side plates between the angle adjustment plates and secure them in the right angle using 4x ISO 4762 M10 x 20mm bolts and 4x DIN 7980 M10 spring lock washers.

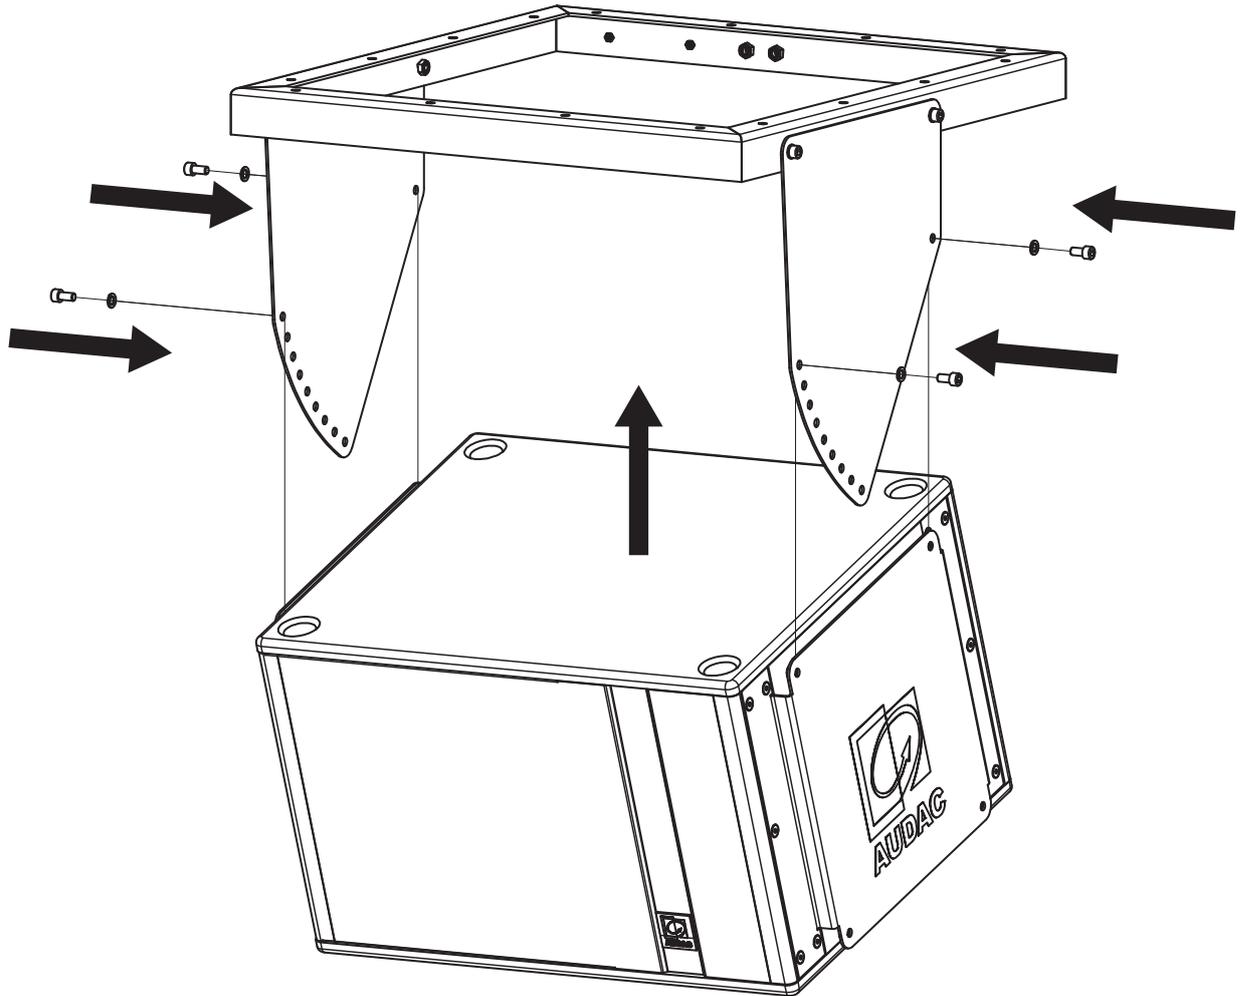

- 6** Use certified steel cables and shackles to secure the speaker cabinets.

!BEWARE! Make sure the supporting structure is strong enough to bear the weight of speakers and bracket.